



New!
Blows away the competition

Smoother Mixing—Twice as Fast

Consistent Feed Mixing

Consistent Feed Discharge

Cyclone


Vertical Mixers with Double Flighted Twin Augers



Patent Pending

Double flighted augers aggressively process and mix for a consistent TMR

Patent Pending

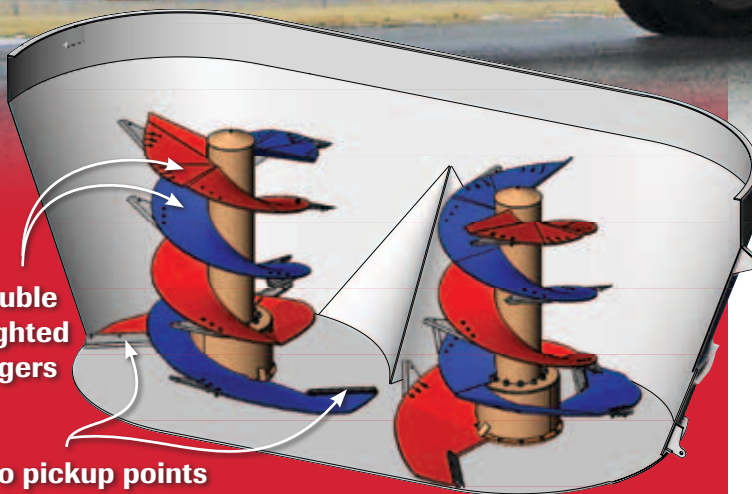

Double Flighted Augers

Two pickup points

Patent Pending

Cyclone Vertical Mixers 1355HDS Trailer shown
1105 to 1505 cubic feet capacities.


Works well with small or large horsepower tractors.

- New HDS system automatically adjusts to your tractor's PTO RPM for best efficiency (on any tractor with recommended HP 180 or higher)
- Two pickup points on each auger
- Double flighting moves more material upward with each revolution
- Smooth running and less mixer rocking at higher RPM's

ROTO-MIX LLC

2205 East Wyatt Earp Blvd., P.O. Box 1724, Dodge City, Kansas 67801
Fax 620.225.6370 • www.rotomix.com • info@rotomix.com

620.225.1142

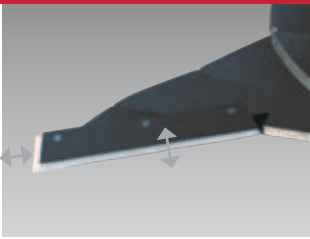

Two adjustable leading edges per auger allow you to maintain top performance.



Optional large rear door for fast unloading of pre-mix loads.



Simple chain and slat conveyor can be assembled for right or left hand discharge. Hydraulically controlled conveyor extension for feeding on the floor or in feed bunks.



New wide conveyor with heavy-duty chain and slats for faster feedout.

Cyclone

with



Complete control from the tractor cab monitor for mix, feed and cleanout modes.



Mixes in half the time. Twin fighting double augers have 4 pickup points (2 on each auger).

New Hydraulic Drive System (HDS) Enhances Efficiency

The patent pending Hydraulic Drive System (HDS) reacts to the tractor PTO RPM to keep the tractor operating at its most efficient engine speed regardless of auger loading and/or available tractor horsepower. When the tractor is running at 1,000 PTO RPM speed, the HDS takes over.

Cyclone—Double Flighted Series Specifications	1105	1355	1505
Weight, Trailer Models	17,100	20,600	21,030
Weight, 8" End Cap Extensions	150	150	150
PTO Speed	1,000	1,000	1,000
Tires O.D., Trailers	42"	37"	37"
Tires Size, Trailers	11R x 22.5"	255R70 x 22.5"	255R70 x 22.5"
Conveyor Width, Conveyor Models	42"	42"	42"
Loading Height, Trailers	114"	130"	140"
Maximum Load with a Hay Ration	19,800 lbs.	24,300 lbs.	27,000 lbs.
Maximum Load with a Heavy Ration	27,500 lbs.	33,750 lbs.	37,500 lbs.
Mixing Capacity (cu. ft.)	1,100	1,350	1,500
Recommended PTO Horsepower	180HP	200HP	220HP

All Dimensions and Specification are Subject to Change Without Notice

Ask for a demonstration

Distributed by:



For additional information visit us at

www.rotomix.com